

COUPE Tilable Cup Recessed Downlight

Tilable LED downlight · Class III SELV · external driver A03-0007 · Ø 68–75 mm

COUPE inbouwspot (NL) · COUPE Kippbare Einbauleuchte (DE)



Class III SELV · supplied via the included external foldable driver A03-0007

Driver: input 200–240 V AC 50 Hz · output 14–22 V DC · 185–270 mA · PF ≥ 0.9 · T_c 75 °C

5 W · 78–85 lm/W · 90° beam · CRI ≥ 90 · dimmable (via driver)

Ø 68–75 mm cut-out (Ø 82 × 26 mm external dimensions) · tilable reflector cup

Colour temperature selectable at installation: 2700K / 3000K / 4000K / DTW · White or Black



Class III SELV — the luminaire is supplied via an external driver A03-0007. The driver sits between mains voltage (230 V) and the luminaire (SELV, ≤ 22 V DC). **NEVER** connect the luminaire directly to mains voltage. Install the driver in a ventilated, dry location.

NEN 1010 · AREI · DIN VDE 0100 · IEC 60364



SAFETY WARNINGS — MULTILINGUAL Sicherheitshinweise · Consignes de sécurité · Avvertenze di sicurezza

NL

Installatie alleen door vakbekwaam personeel. Spanning afschakelen vóór montage. Volg NEN 1010 / IEC 60364. Dry indoor installation — uitsluitend voor binnen, in droge ruimtes. Class III SELV — never connect directly to mains voltage.

DE

Nur durch Fachpersonal installieren. Vor Installation spannungsfrei schalten. DIN VDE 0100 beachten. Dry indoor installation — nur Innenräume, trocken. Class III SELV — never connect directly to mains voltage.

IT

Installazione solo da personale qualificato. Togliere tensione prima dell'installazione. Dry indoor installation — solo interno, ambienti asciutti. Class III SELV — never connect directly to mains voltage.

PT

Instalação apenas por pessoal qualificado. Desligar a tensão antes da instalação. Dry indoor installation — apenas interior, seco. Class III SELV — never connect directly to mains voltage.

CS

Instalaci provádí pouze kvalifikovaný personál. Před instalací odpojte napětí. Dry indoor installation — pouze vnitřní, suché prostory. Class III SELV — never connect directly to mains voltage.

SV

Installation endast av kvalificerad personal. Bryt spänningen före installation. Dry indoor installation — endast inomhus, torr. Class III SELV — never connect directly to mains voltage.

NO

Installasjon kun av kvalifisert personell. Koble fra spenningen før installasjon. Dry indoor installation — kun innendørs, tørr. Class III SELV — never connect directly to mains voltage.

EN

Install only by qualified personnel. Disconnect voltage before installation. Follow IEC 60364. Dry indoor installation — indoor use only, dry spaces. Class III SELV — never connect directly to mains voltage.

FR

Installation par personnel qualifié uniquement. Couper la tension avant installation. Respecter NF C 15-100. Dry indoor installation — intérieur sec. Class III SELV — never connect directly to mains voltage.

ES

Instalación solo por personal cualificado. Desconectar la tensión antes de la instalación. Dry indoor installation — solo interior, seco. Class III SELV — never connect directly to mains voltage.

PL

Instalacja tylko przez wykwalifikowany personel. Odłączyć napięcie przed instalacją. Dry indoor installation — tylko wewnątrz, suchy. Class III SELV — never connect directly to mains voltage.

DA

Installation kun af kvalificeret personale. Frakobl spændingen før installation. Dry indoor installation — kun indendørs, tørr. Class III SELV — never connect directly to mains voltage.

FI

Asennuksen saa suorittaa vain pätevä henkilöstö. Katkaise jännite ennen asennusta. Dry indoor installation — vain sisätiloissa, kuivissa. Class III SELV — never connect directly to mains voltage.

1. PRODUCT IDENTIFICATION


Wibo SKU	Description
WB-ISP-100-013	White · COUPE Tilable · with external driver A03-0007
WB-ISP-100-014	Black · COUPE Tilable · with external driver A03-0007

2. SAFETY INSTRUCTIONS

- Switch off the mains power before performing installation or maintenance work.
- Installation only by a qualified electrician. Follow NEN 1010 / AREI / DIN VDE 0100 / IEC 60364.
- Maintain the minimum free space above the ceiling as specified (25 mm for Tiran) and ensure that insulation material does not cover the fixture.
- Use only indoors at the stated IP rating. MIND is suitable for veranda/canopy (IP67). CLARA and Tiran are for dry indoor spaces.
- In case of malfunction: immediately switch off the mains power and contact Wibo Lighting or your installer.
- The LED light source is not replaceable by the end user. In case of defect: replace the entire fixture (COUPE: driver replaceable separately by qualified personnel).

3. INSTALLATION

1	Switch off the mains power at the distribution board.
2	Cut a Ø 68–75 mm hole in the ceiling.
3	Connect the mains-side of the driver: L = brown, N = blue to the driver input (earth conductor is not required at the luminaire side for Class III SELV).
4	Connect the SELV output of the driver (14–22 V DC) to the luminaire via the included connector.
5	Place the driver in a ventilated, dry location that is accessible for possible replacement.
6	Click the luminaire into the cut-out and set the desired tilt angle.
7	Switch the mains power back on — installation complete.

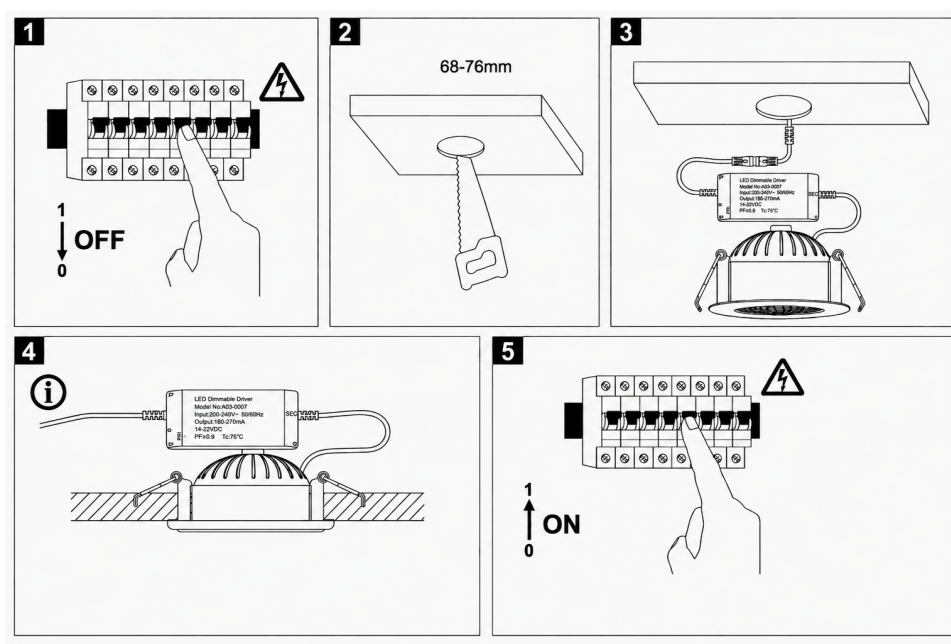

4. MAINTENANCE

- Switch off the mains power and wait until the product has cooled down.
- Remove dust with a dry cloth or soft brush.
- Clean with a slightly damp cloth. Do not use aggressive cleaning agents or solvents.
- Periodically check that all connections are firmly tightened.

5. CE CONFORMITY

This product is CE-marked and complies with the following EU legislation:

- Low Voltage Directive 2014/35/EU (LVD) — external driver A03-0007
- Electromagnetic Compatibility 2014/30/EU (EMC)
- RoHS Directive 2011/65/EU + (EU) 2015/863
- Ecodesign 2009/125/EC + Regulation (EU) 2019/2020
- Energy Labelling Regulation (EU) 2019/2015

Energy Label + EPREL registration: this product contains an integrated light source and falls within the scope of Regulation (EU) 2019/2015. EPREL registration [PENDING] — reference will be shown on the product packaging and on wibo-lighting.com once registration is complete.

The complete EU Declaration of Conformity (DoC) and all test reports are retained for 10 years after last placement on the market by the manufacturer and are available to market surveillance authorities upon reasoned request. Current version of the DoC: docs.wibo-lighting.com/v/coupe/

6. WARRANTY & LIFETIME

Warranty: 10 years against manufacturing defects when used correctly within specification.

LED lifetime: ≥ 50 000 hours (L70/B50 per EN 62717) — LED not replaceable, driver A03-0007 replaceable by qualified personnel.

7. WEEE — DISPOSAL



This product must not be disposed of with household waste. At end of life, hand it in at an approved collection point for waste electrical and electronic equipment (WEEE), or return it to your point of sale. Wibo Lighting is registered with Stichting OPEN (WEEE-Netherlands).

8. MANUFACTURER & TRACEABILITY (GPSR EU 2023/988)

Manufacturer	Wibo Import B.V. (trading as Wibo Lighting)
Address	Nijverheidsstraat 2, 7591 BM Denekamp, The Netherlands
E-mail · Web	info@wibo-lighting.com · wibo-lighting.com
KvK (CoC)	42058389
Role	Manufacturer under own brand per EU 2019/1020 art. 4 — Responsible Person in the EU
Document ID	WB-DOC-ISP-100-COUPE-v2 · issued 24 July 2026
Current version	docs.wibo-lighting.com/v/coupe/ (see QR code on cover)
Batch / serial number	202608 — shown on the product packaging or type plate