




220–240 V AC · 50 Hz · 3-phase (4-wire) · phase selector Off/1/2/3

35 W · Frosted diffuser · Beam 90° · CRI ≥ 90 · 90–100 lm/W ·
~3150–3500 lm

Colour temperature selectable via DIP + CCT switch: 2700 K / 3000 K /
4000 K

IP20 · Class II (double-insulated) · Indoor use only · On/Off (not
dimmmable)

Aluminium housing · integrated driver · rotatable / tiltable



230/400 V mains voltage · 3-phase — installation strictly by a qualified electrician
Before power-on: select the desired phase (Off / 1 / 2 / 3) and the desired colour temperature
(2700K / 3000K / 4000K) using the DIP switch at the rear.

NEN 1010 · AREI · DIN VDE 0100 · IEC 60364



SAFETY WARNINGS — MULTILINGUAL Sicherheitshinweise · Consignes de sécurité · Avvertenze di sicurezza

NL

Installatie alleen door vakbekwaam personeel. Spanning afschakelen vóór montage. Volg NEN 1010 / IEC 60364. IP20 — uitsluitend voor binnen, in droge en stofvrije ruimtes. Class II (double-insulated, no earth conductor).

DE

Nur durch Fachpersonal installieren. Vor Installation spannungsfrei schalten. DIN VDE 0100 beachten. IP20 — nur Innenräume, trocken und staubfrei. Class II (double-insulated, no earth conductor).

IT

Installazione solo da personale qualificato. Togliere tensione prima dell'installazione. IP20 — solo interno, ambienti asciutti e senza polvere. Class II (double-insulated, no earth conductor).

PT

Instalação apenas por pessoal qualificado. Desligar a tensão antes da instalação. IP20 — apenas interior, seco e sem pó. Class II (double-insulated, no earth conductor).

CS

Instalaci provádí pouze kvalifikovaný personál. Před instalací odpojte napětí. IP20 — pouze vnitřní, suché a bezprašné prostory. Class II (double-insulated, no earth conductor).

SV

Installation endast av kvalificerad personal. Bryt spänningen före installation. IP20 — endast inomhus, torrt och dammfritt. Class II (double-insulated, no earth conductor).

NO

Installasjon kun av kvalifisert personell. Koble fra spenningen før installasjon. IP20 — kun innendørs, tørt og støvfritt. Class II (double-insulated, no earth conductor).

EN

Install only by qualified personnel. Disconnect voltage before installation. Follow IEC 60364. IP20 — indoor use only, in dry and dust-free spaces. Class II (double-insulated, no earth conductor).

FR

Installation par personnel qualifié uniquement. Couper la tension avant installation. Respecter NF C 15-100. IP20 — intérieur sec et sans poussière. Class II (double-insulated, no earth conductor).

ES

Instalación solo por personal cualificado. Desconectar la tensión antes de la instalación. IP20 — solo interior, espacios secos y sin polvo. Class II (double-insulated, no earth conductor).

PL

Instalacja tylko przez wykwalifikowany personel. Odłączyć napięcie przed instalacją. IP20 — tylko wewnątrz, sucho i bez kurzu. Class II (double-insulated, no earth conductor).

DA

Installation kun af kvalificeret personale. Frakobl spændingen før installation. IP20 — kun indendørs, tørt og støvfrit. Class II (double-insulated, no earth conductor).

FI

Asennuksen saa suorittaa vain pätevä henkilöstö. Katkaise jännite ennen asennusta. IP20 — vain sisätiloissa, kuivissa ja pölyttömissä tiloissa. Class II (double-insulated, no earth conductor).

1. PRODUCT IDENTIFICATION


Wibo SKU	EAN	Description
WB-RSP-200-019	9507429772194	Black · 35 W · Frosted diffuser · 90° · 2700/3000/4000K DIP
WB-RSP-200-020	9509149592434	White · 35 W · Frosted diffuser · 90° · 2700/3000/4000K DIP

2. SAFETY INSTRUCTIONS

- Switch off the mains power before performing installation or maintenance work.
- Installation only by a qualified electrician. Follow NEN 1010 / AREI / DIN VDE 0100 / IEC 60364.
- Maintain at least 100 mm between fixtures and at least 500 mm from any other material in the surroundings. Never cover the fixture or the rail system with insulating material.
- Use only indoors, in dry and dust-free spaces. Do not use in spaces with vibration, high temperatures or volatile substances.
- In case of malfunction: immediately switch off the mains power and contact Wibo Lighting or your installer.
- Never touch the inside of the rail while power is on.

3. INSTALLATION

1	Switch off the mains power at the distribution board.
2	Set the desired colour temperature using the DIP switch at the rear of the fixture (2700K / 3000K / 4000K).
3	Select the desired phase using the switch on the adapter (Off / 1 / 2 / 3).
4	Insert the fixture into the guide rails and turn the locking lever until you hear the click of complete fixing.
5	Switch the mains power back on — installation complete.

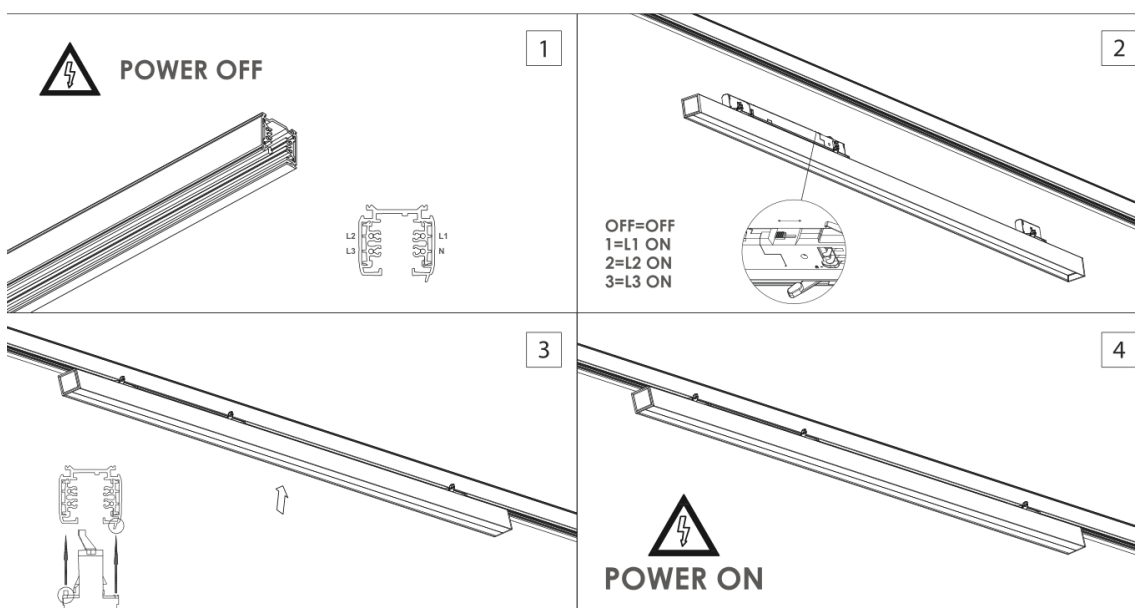

4. MAINTENANCE

- Switch off the mains power and wait until the product has cooled down.
- Remove dust with a dry cloth or soft brush.
- Clean with a slightly damp cloth. Do not use aggressive cleaning agents or solvents.
- Periodically check that all connections are firmly tightened.

5. CE CONFORMITY

This product is CE-marked and complies with the following EU legislation:

- Low Voltage Directive 2014/35/EU (LVD)
- Electromagnetic Compatibility 2014/30/EU (EMC)
- RoHS Directive 2011/65/EU + (EU) 2015/863
- Ecodesign 2009/125/EC + Regulation (EU) 2019/2020
- Energy Labelling Regulation (EU) 2019/2015

Energy Label + EPREL registration: this product contains an integrated light source and falls within the scope of Regulation (EU) 2019/2015. EPREL registration [PENDING] — reference will be shown on the product packaging and on wibo-lighting.com once registration is complete.

The complete EU Declaration of Conformity (DoC) and all test reports are retained for 10 years after last placement on the market by the manufacturer and are available to market surveillance authorities upon reasoned request. Current version of the DoC: docs.wibo-lighting.com/v/senna-frosted/

6. WARRANTY & LIFETIME

Warranty: 5 years against manufacturing defects when used correctly within specification.

LED lifetime: $\geq 50\,000$ hours (L70/B50 per EN 62717) at $T_a \leq 25\,^{\circ}\text{C}$. The LED light source is not replaceable by the end user.

7. WEEE — DISPOSAL



This product must not be disposed of with household waste. At end of life, hand it in at an approved collection point for waste electrical and electronic equipment (WEEE), or return it to your point of sale. Wibo Lighting is registered with Stichting OPEN (WEEE-Netherlands).

8. MANUFACTURER & TRACEABILITY (GPSR EU 2023/988)

Manufacturer	Wibo Import B.V. (trading as Wibo Lighting)
Address	Nijverheidsstraat 2, 7591 BM Denekamp, The Netherlands
E-mail · Web	info@wibo-lighting.com · wibo-lighting.com
KvK (CoC)	42058389
Role	Manufacturer under own brand per EU 2019/1020 art. 4 — Responsible Person in the EU
Document ID	WB-DOC-RSP-200-SENNA-v2 · issued 24 July 2026
Current version	docs.wibo-lighting.com/v/senna-frosted/
Batch / serial number	202608 — shown on the product packaging or type plate